

**E** **Track Systems**

1.10 TRUMPF



## 1.10 TRUMPF

**Track for Medium Duty Curtain Applications and/or Lightweight Scenery Applications, for Permanent Installations only**

Curtain Track Options

TRUMPF: a curtain track for medium duty applications.

For permanent installations only.


- Walk-along track:  
System without motor operation.
- Side cord operation:  
For straight track configurations up to 12 m. Compact size with minimal space requirements.

Stacking Space Calculation


For each side of curtain, multiply:  
 number of runners  
 x length of each runner (approx. 4 – 5 runners per meter)  
 + length of master runner  
 + lengths of head and return pulleys  
 + length of end stop



TRUMPF

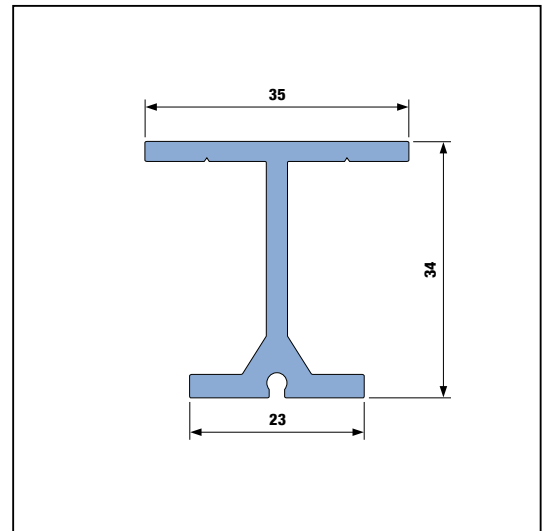

Track section scale 1:1

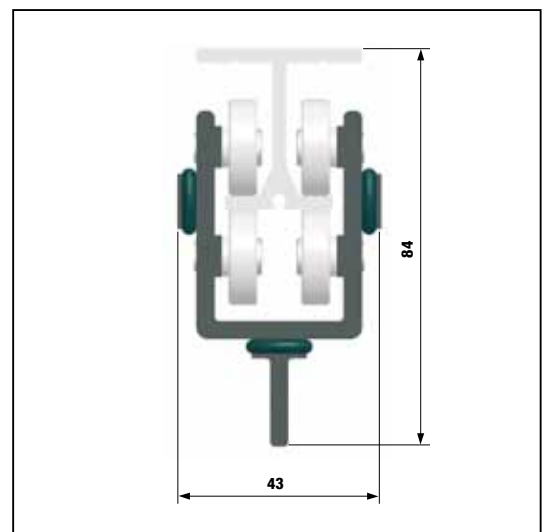

Track section with runner

## 1.10 TRUMPF

### Walk-Along Track

Walk-along track system without motor operation. Manually opening and closing.

The basic system to open and close curtains or to move scenery along a track.


#### Mounting Considerations

Curtain height should be calculated from attachment hole in runners.


Please calculate length of each runner and master runner for stacking space.

#### List of Parts for Sample System Below


Art. - No.	Article	Page
3110 1011	Track, Straight, black	25
3100 8021	Ceiling Mounting Plate, black	27
3110 0061	End Stop	27
3100 0011	Master Runner 4+4	27
3100 0021	2-Wheel Runner, black	26
3100 0031	4-Wheel Runner	26

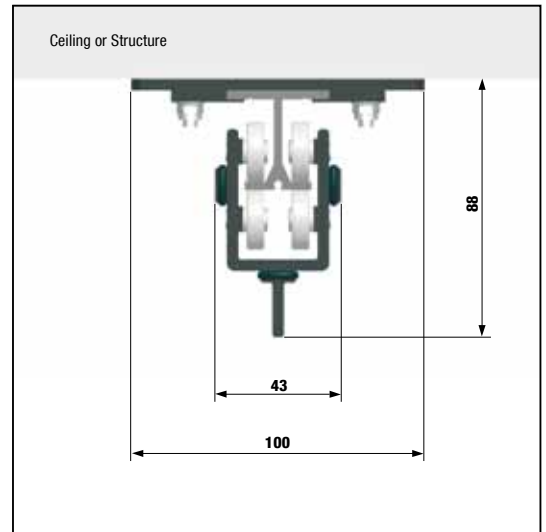

End View

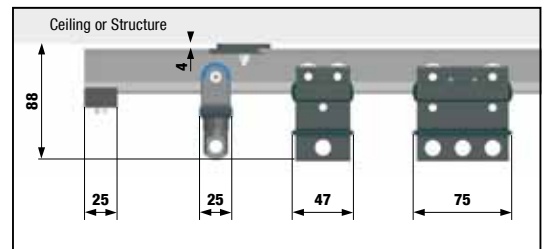


Side View

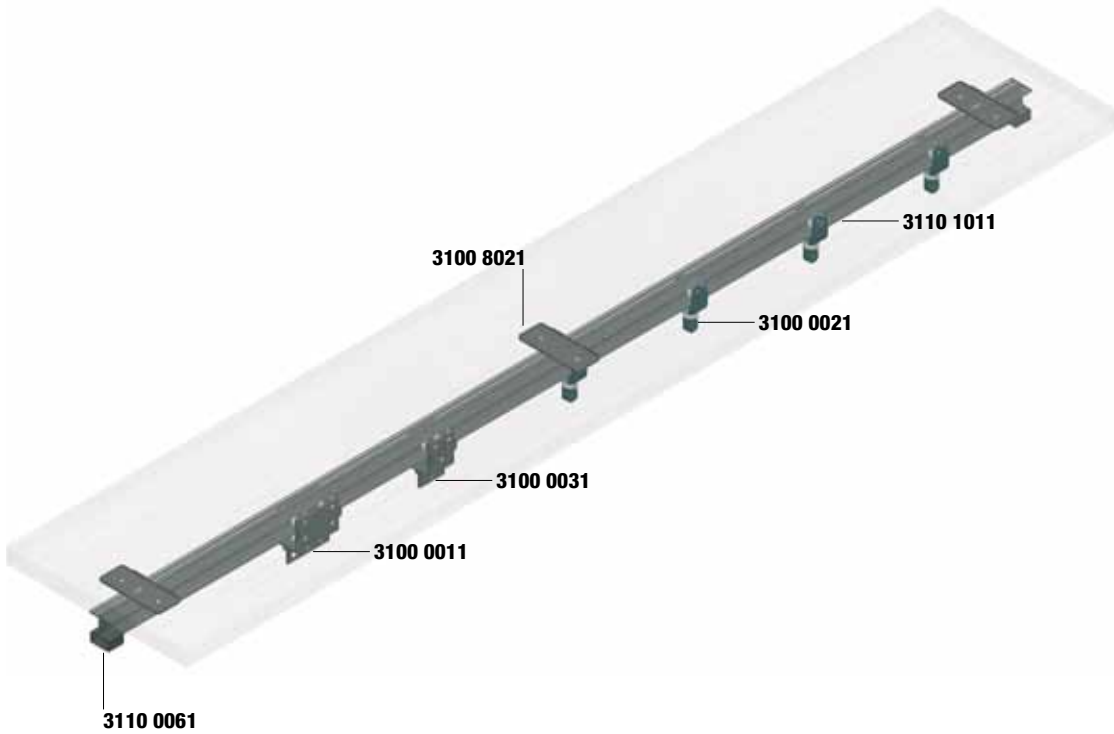


## 1.10 TRUMPF: Walk-Along Track


Art.- No.	<b>Track, Straight</b> <ul style="list-style-type: none"> <li>Extruded Aluminum profile ALMgSi 0,5 F22.</li> <li>Joint pin connection.</li> </ul>	Length cm	Weight g/rm
<b>3110 1011</b>	Colour: black anodized	600	660
<b>3110 1012</b>	Colour: clear anodized	600	660
<b>3110 1021</b>	Cut length, colour: black anodized	up to 600	660
<b>3110 1022</b>	Cut length, colour: clear anodized	up to 600	660

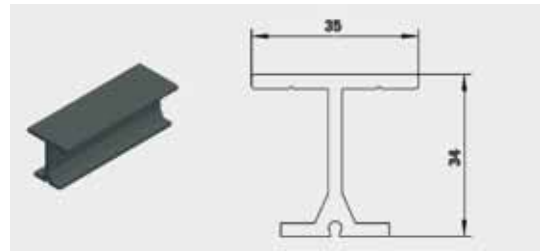


Art.- No.	<b>Track Straight, Predrilled</b> <ul style="list-style-type: none"> <li>Technical details: see track, straight.</li> <li>Predrilled holes in top of track in 20 cm increments.</li> </ul>	Length cm	Weight g/rm
<b>3110 1013</b>	Colour: black anodized	600	660
<b>3110 1014</b>	Colour: clear anodized	600	660
<b>3110 1023</b>	Cut length, colour: black anodized	up to 600	660
<b>3110 1024</b>	Cut length, colour: clear anodized	up to 600	660

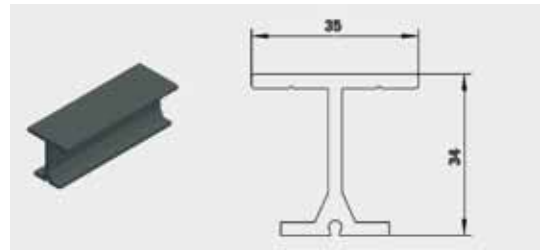


Art.- No.	<b>Track, Curved - without Splice</b> <ul style="list-style-type: none"> <li>Technical details: see track, straight.</li> <li>1/4 circle, 90° curve.</li> </ul>	Radius cm	Weight g
<b>3110 1031</b>	Colour: black anodized	30	311
<b>3110 1032</b>	Colour: clear anodized	30	311
<b>3110 1051</b>	Colour: black anodized	50	518
<b>3110 1052</b>	Colour: clear anodized	50	518
<b>3110 1071</b>	Colour: black anodized	100	1.037
<b>3110 1072</b>	Colour: clear anodized	100	1.037
<b>3110 1091</b>	Custom curve, colour: black anodized	-	-
<b>3110 1092</b>	Custom curve, colour: clear anodized	-	-

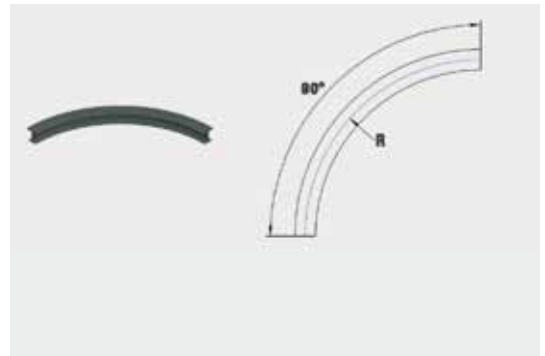

Art.- No.	<b>Track, Curved - without Splice, Predrilled</b> <ul style="list-style-type: none"> <li>Technical details: see track, straight.</li> <li>1/4 circle, 90° curve.</li> </ul>	Radius cm	Weight g
<b>3110 1033</b>	Colour: black anodized	30	311
<b>3110 1034</b>	Colour: clear anodized	30	311
<b>3110 1053</b>	Colour: black anodized	50	518
<b>3110 1054</b>	Colour: clear anodized	50	518
<b>3110 1073</b>	Colour: black anodized	100	1.037
<b>3110 1074</b>	Colour: clear anodized	100	1.037
<b>3110 1093</b>	Custom curve, colour: black anodized	-	-
<b>3110 1094</b>	Custom curve, colour: clear anodized	-	-

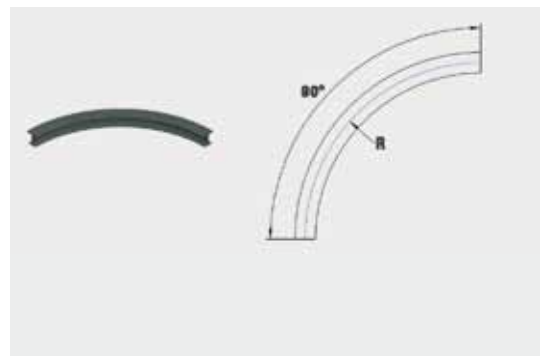


Art.- No.	<b>Track Curved - with Splice</b> <ul style="list-style-type: none"> <li>Technical details: see track, straight.</li> <li>1/4 circle, 90° curve.</li> </ul>	Radius cm	Weight g
<b>3110 1041</b>	Colour: black anodized	30	575
<b>3110 1042</b>	Colour: clear anodized	30	575
<b>3110 1061</b>	Colour: black anodized	50	782
<b>3110 1062</b>	Colour: clear anodized	50	782
<b>3110 1081</b>	Colour: black anodized	100	1.301
<b>3110 1082</b>	Colour: clear anodized	100	1.301
<b>3110 1101</b>	Custom curve, colour: black anodized	-	-
<b>3110 1102</b>	Custom curve, colour: clear anodized	-	-

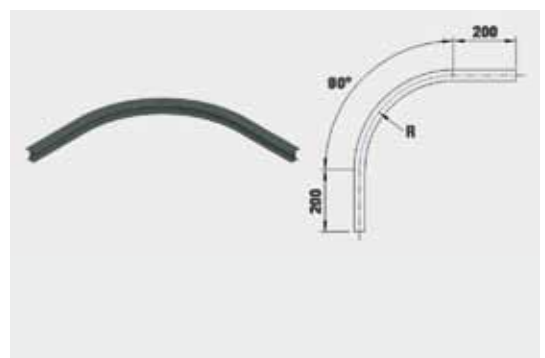


## 1.10 TRUMPF: Walk-Along Track


Art.- No.	Track, Curved - with Splice, Predrilled	Radius cm	Weight g
	<ul style="list-style-type: none"> <li>Holes on top of track in 20 cm increments.</li> <li>1/4 circle, 90°.</li> </ul>		
<b>3110 1043</b>	Colour: black anodized	30	575
<b>3110 1044</b>	Colour: clear anodized	30	575
<b>3110 1063</b>	Colour: black anodized	50	782
<b>3110 1064</b>	Colour: clear anodized	50	782
<b>3110 1083</b>	Colour: black anodized	100	1.301
<b>3110 1084</b>	Colour: clear anodized	100	1.301
<b>3110 1103</b>	Custom curve, colour: black anodized	-	-
<b>3110 1104</b>	Custom curve, colour: clear anodized	-	-

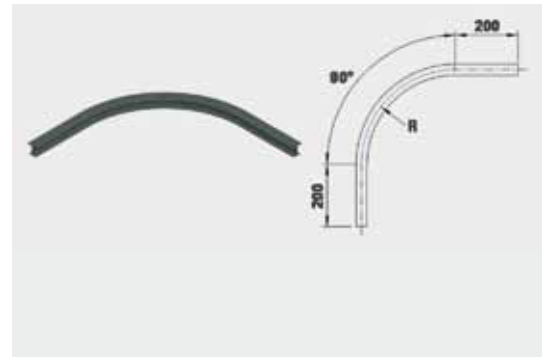


Art.- No.	Joint Pin, 10 per Pack	Weight g/piece
	<ul style="list-style-type: none"> <li>Steel pin Ø 2,5 mm.</li> <li>For precise track connection.</li> </ul>	
<b>3100 9115</b>	Colour: black	1

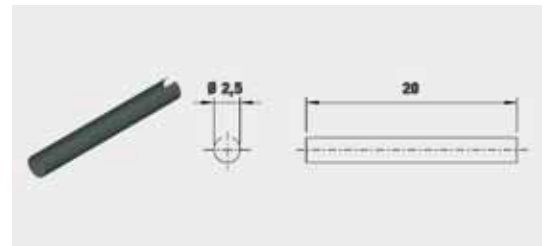


Art.- No.	2-Wheel Runner, Black	Load Capacity kg	Weight g
	<ul style="list-style-type: none"> <li>2 Load bearing wheels, ball bearing.</li> <li>Gel bumpers to reduce stacking noise.</li> <li>With 360° curtain swivel attachment.</li> </ul>		
<b>3100 0021</b>	Colour: black	10	40

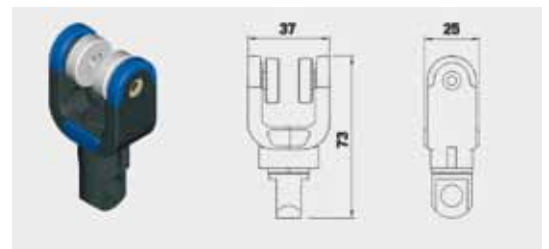

Art.- No.	2-Wheel Runner, White	Load Capacity kg	Weight g
	<ul style="list-style-type: none"> <li>2 load bearing wheels, ball bearing.</li> <li>Gel bumpers to reduce stacking noise.</li> <li>With 360° curtain swivel attachment.</li> </ul>		
<b>3100 0022</b>	Colour: white	10	40

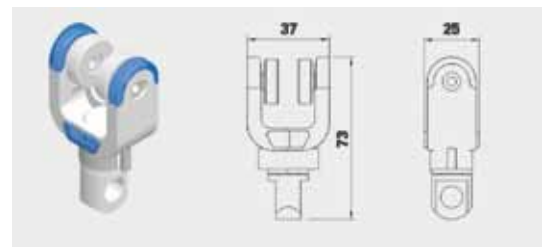


Art.- No.	4-Wheel Runner	Load Capacity kg	Weight g
	<ul style="list-style-type: none"> <li>4 top load bearing and 2 bottom stabilizing wheels, ball bearing.</li> <li>Rubber rings to reduce stacking noise.</li> </ul>		
<b>3100 0031</b>	Colour: black	20	110

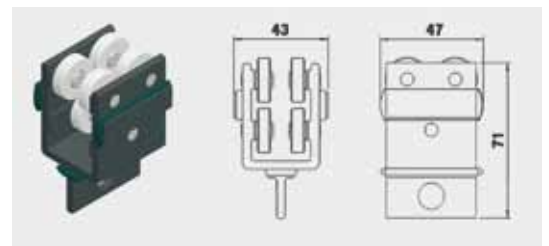


## 1.10 TRUMPF: Walk-Along Track


Art.- No.	<b>Master Runner 4+4</b> <ul style="list-style-type: none"> <li>• 4 top load bearing and 4 bottom stabilizing wheels, ball bearing.</li> <li>• Rubber rings to reduce stacking noise.</li> </ul>	Load Capacity kg	Weight g
<b>3100 0011</b>	Colour: black	20	180

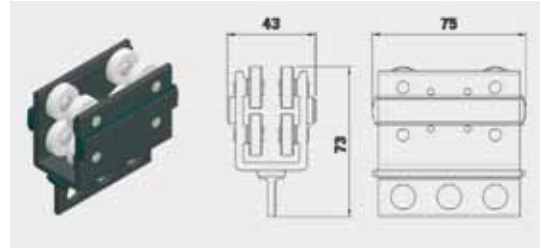


Art.- No.	<b>Master Runner 4+4 with Overlap Arm</b> Details: please see 3100 0011.	Load Capacity kg	Weight g
<b>3110 0011</b>	Colour: black	20	410

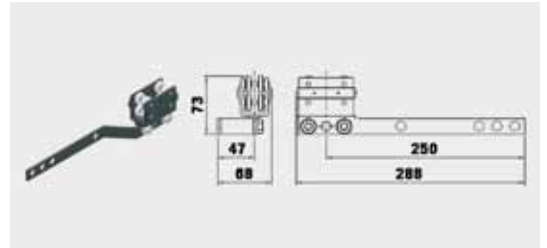

Art.- No.	<b>End Stop</b> <ul style="list-style-type: none"> <li>• With screw.</li> </ul>	Weight g
<b>3110 0061</b>	Colour: black	20

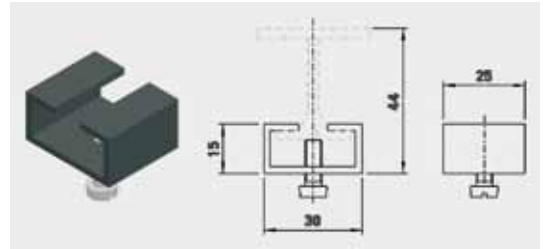

Art.- No.	<b>Ceiling Mounting Plate</b> <ul style="list-style-type: none"> <li>• For direct ceiling/surface mounting.</li> <li>• Adjustment area: +/- 4 mm.</li> <li>• With hole to accept 6 mm screw.</li> </ul>	Weight g
<b>3100 8021</b>	Colour: black	185
<b>3100 8022</b>	Colour: silver	185

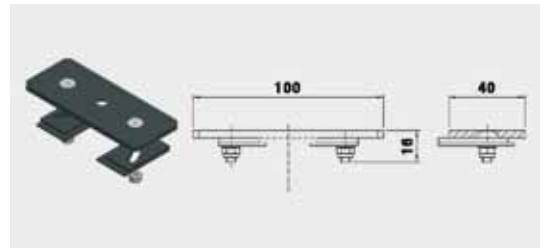

TRUMPF

## 1.10 TRUMPF

### Side Cord Operation

Important

The TRUMPF track system allows only side rope operation.

Please note:

- Only for straight, single track configurations up to 12 m.
- Overlap arms allow a center overlap up to 36 cm.




Mounting Considerations

Please consider installation heights for system design and assembly.

Lengths of head and return pulley must be included in stacking area calculation.


List of Parts for Sample System Below

Art.-Nr.	Article	Page
3110 1013	Track straight, Predrilled, black anodized	29
3110 3021	Head Pulley	30
3100 0121	Single Return Pulley	31
3110 3031	Rope Guide Pulley	31
3110 0061	End Stop	30
3100 4011	Master Runner 4+4	30
3100 0031	4-Wheel Runner	29
3100 0021	2-Wheel Runner, black	29
4104 1182	Polyester Rope Ø 8 mm	32
3100 7071	Adjustable Floor Pulley 180	32

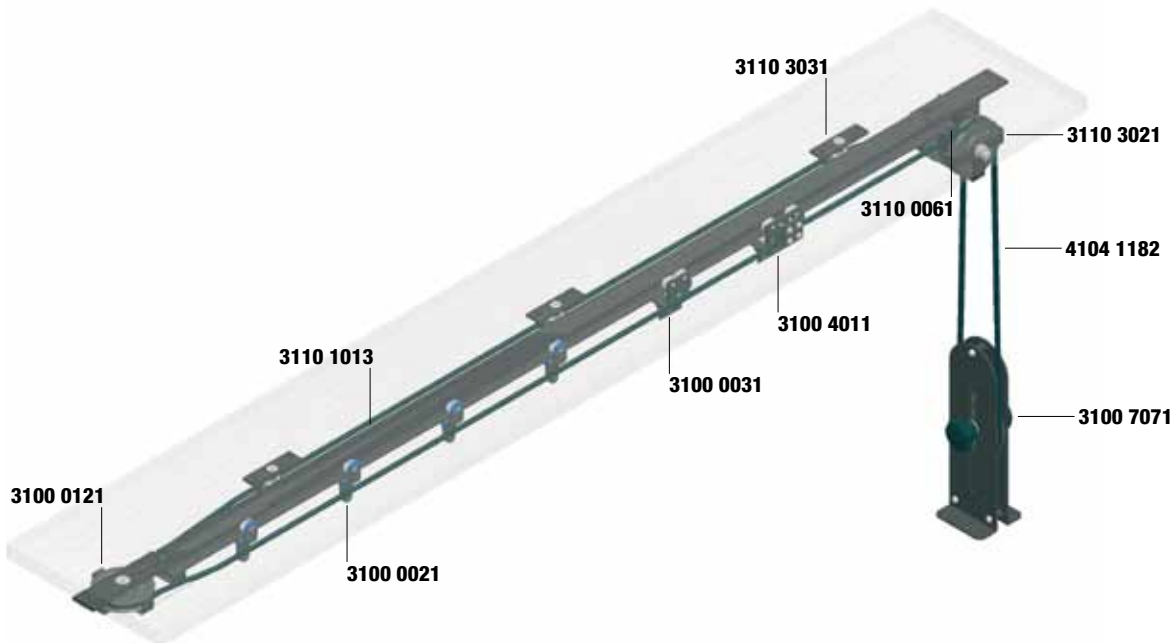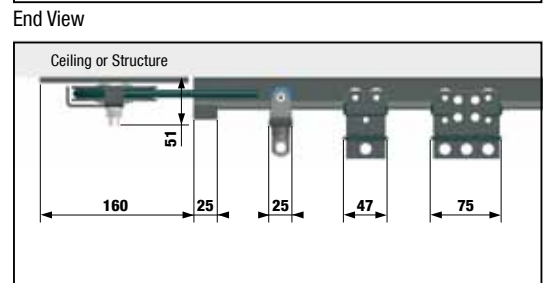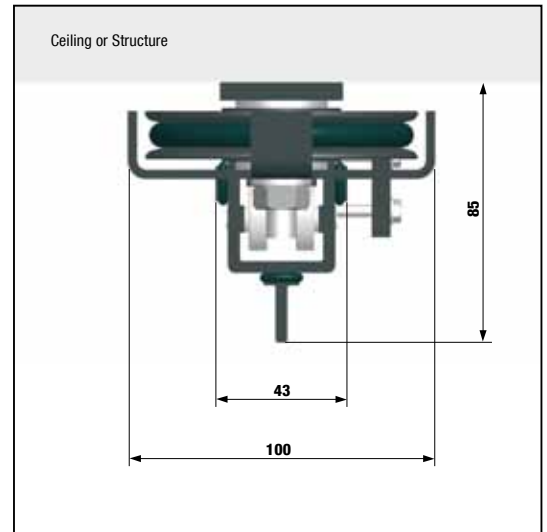


## 1.10 TRUMPF: Side Cord Operation


Art.- No.	<b>Track, Straight</b> <ul style="list-style-type: none"> <li>Aluminum extruded profile, ALMgSi 0,5 F22.</li> <li>Joint pin connection.</li> </ul>	Length cm	Weight g/rm
<b>3110 1011</b>	Colour: black anodized	600	660
<b>3110 1012</b>	Colour: clear anodized	600	660
<b>3110 1021</b>	Cut length, colour: black anodized	up to 600	660
<b>3110 1022</b>	Cut length, colour: clear anodized	up to 600	660

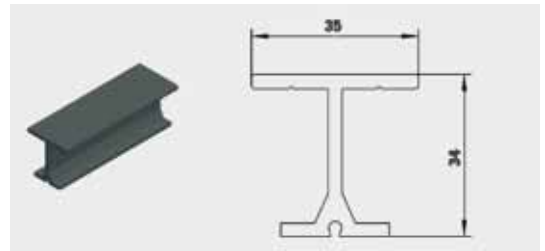


Art.- No.	<b>Track Straight, Pre drilled</b> <ul style="list-style-type: none"> <li>Technical Details: see Track, straight.</li> <li>Pre drilled holes in top of track in 20 cm increments.</li> </ul>	Length cm	Weight g/rm
<b>3110 1013</b>	Colour: black anodized	600	660
<b>3110 1014</b>	Colour: clear anodized	600	660
<b>3110 1023</b>	Cut length, colour: black anodized	up to 600	660
<b>3110 1024</b>	Cut length, colour: clear anodized	up to 600	660

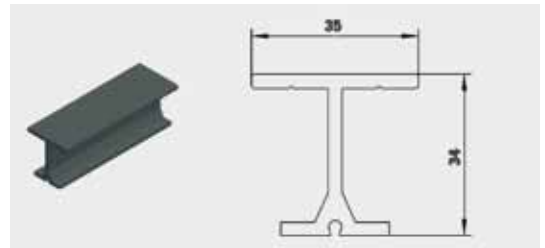


Art.- No.	<b>Joint Pins, 10 per Pack</b> <ul style="list-style-type: none"> <li>Steel pin Ø 2,5 mm.</li> <li>For precise track connection.</li> </ul>		Weight g/piece
<b>3100 9115</b>	Colour: black		1

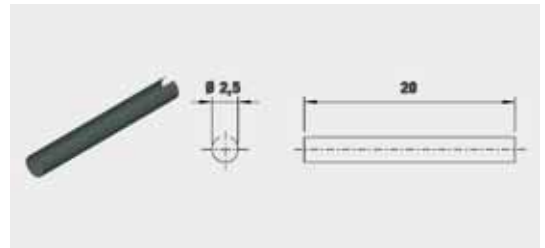


Art.- No.	<b>2-Wheel Runner, Black</b> <ul style="list-style-type: none"> <li>2 load bearing wheels, ball bearing.</li> <li>Gel bumpers reduce stacking noise.</li> <li>With 360° curtain swivel attachment.</li> </ul>	Load Capacity kg	Weight g
<b>3100 0021</b>	Colour: black	10	40

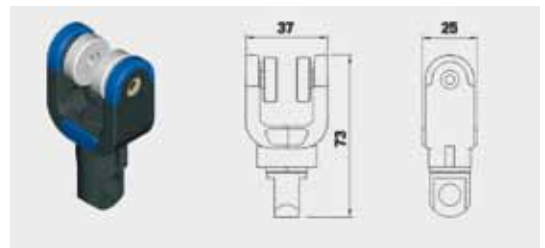

Art.- No.	<b>2-Wheel Runner, White</b> <ul style="list-style-type: none"> <li>2 load bearing wheels, ball bearing.</li> <li>Gel bumpers reduce stacking noise.</li> <li>With 360° curtain swivel attachment.</li> </ul>	Load Capacity kg	Weight g
<b>3100 0022</b>	Colour: white	10	40

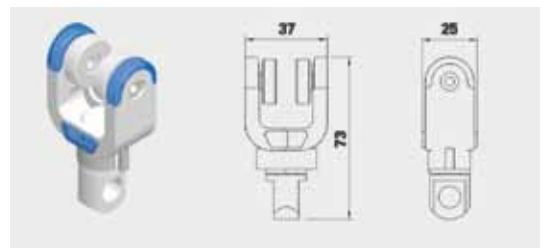


Art.- No.	<b>4-Wheel Runner</b> <ul style="list-style-type: none"> <li>4 top load bearing and 2 bottom stabilizing wheels, ball bearing.</li> <li>Rubber rings to reduce stacking noise.</li> </ul>	Load Capacity kg	Weight g
<b>3100 0031</b>	Colour: black	20	110

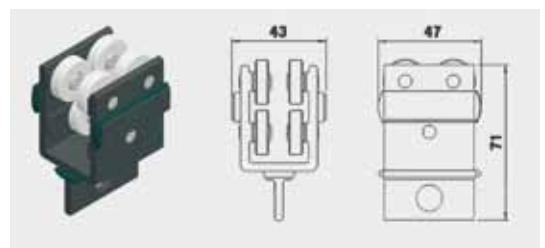


TRUMPF

## 1.10 TRUMPF: Side Cord Operation


Art.- No.	<b>Master Runner 4+4</b> <ul style="list-style-type: none"> <li>• 4 top load bearing and 4 bottom stabilizing wheels, ball bearing.</li> <li>• Rubber bumpers to reduce stacking noise.</li> </ul>	Load Capacity kg	Weight g
<b>3100 0011</b>	Colour: black	20	180

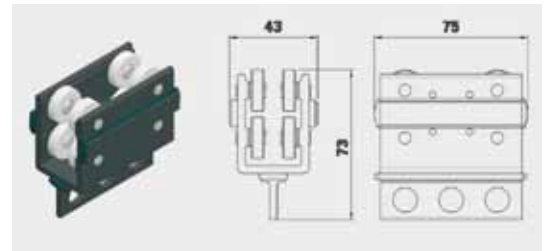


Art.- No.	<b>Master Runner with Rope Attachment Bracket</b> Details: see master runner 4+4 article no. 3100 0011.	Load Capacity kg	Weight g
<b>3110 4011</b>	Colour: black	20	210

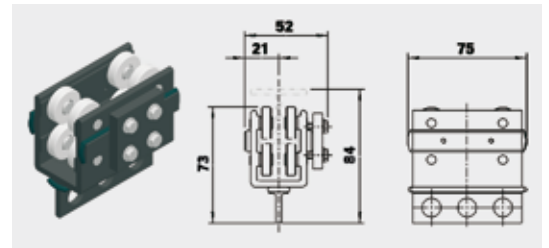


Art.- No.	<b>Master 4+4 Runner with Overlap Arm</b> Details see master runner 4+4 3100 0011.	Load Capacity kg	Weight g
<b>3110 0011</b>	Colour: black	20	410

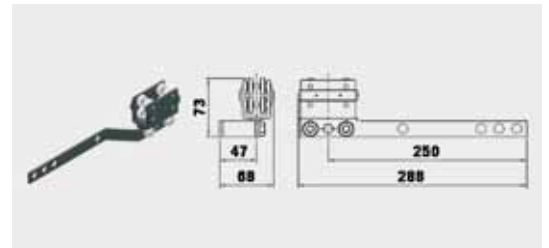


Art.- No.	<b>Master Runner with Rope Attachment Bracket and Overlap Arm</b> Details see master runner 4+4 article no. 3100 0011.	Load Capacity kg	Weight g
<b>3110 4031</b>	Colour: black	20	435

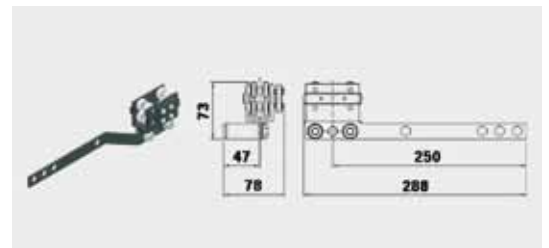

Art.- No.	<b>End Stop</b> <ul style="list-style-type: none"> <li>• With screw.</li> </ul>	Weight g
<b>3110 0061</b>	Colour: black	20

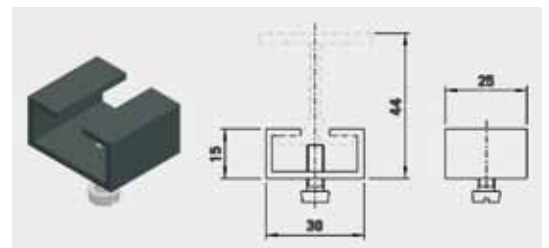


Art.- No.	<b>Head Pulley</b> <ul style="list-style-type: none"> <li>• Diverts operating and returning rope to the floor.</li> <li>• For single and double track systems.</li> <li>• Ball bearing.</li> <li>• For rope up to Ø 8 mm.</li> </ul>	Pulley Diameter mm	Weight g
<b>3110 3021</b>	Colour: black	70	1.000

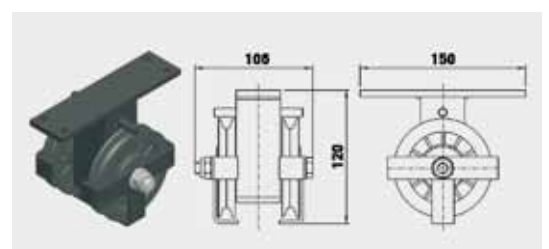


## 1.10: TRUMPF: Side Cord Operation


Art.- No.	<b>Single Return Pulley</b> <ul style="list-style-type: none"> <li>• Returns rope 180° at end of track.</li> <li>• Ball bearing.</li> <li>• For rope up to Ø 8 mm.</li> </ul>	Pulley Diameter mm	Weight g
<b>3100 0121</b>	Colour: black	70	530

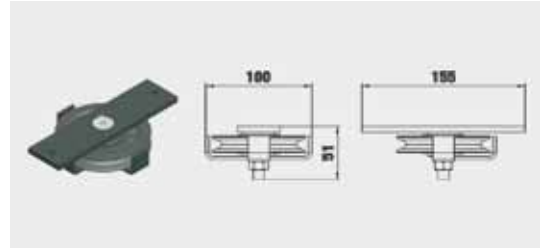


Art.- No.	<b>Rope Guide Pulley</b> <ul style="list-style-type: none"> <li>• No rope sag of returning rope.</li> <li>• Ball bearing.</li> <li>• For rope up to Ø 8 mm.</li> </ul>	Pulley Diameter mm	Weight g
<b>3110 3031</b>	Colour: black	70	495

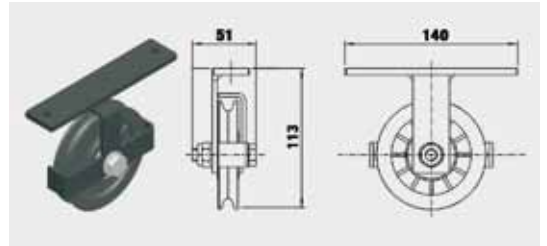


Art.- No.	<b>Rope Guide Pulley</b> <ul style="list-style-type: none"> <li>• Guides returning rope.</li> <li>• Ball bearing.</li> <li>• For up to Ø 8 mm rope.</li> </ul>	Pulley Diameter mm	Weight g
<b>3100 0141</b>	Colour: black	25	165

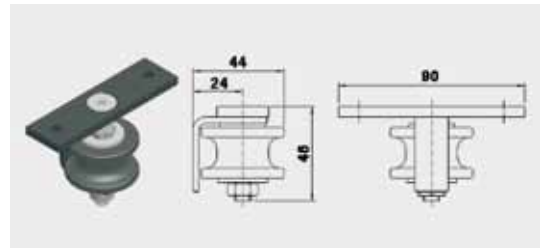


Art.- No.	<b>Tension Return Pulley</b> <ul style="list-style-type: none"> <li>• Adjustable rope tensioning.</li> <li>• Use instead of return pulley.</li> <li>• Tension distance: 150 mm.</li> <li>• Ball bearing.</li> </ul>	Pulley Diameter mm	Weight g
<b>3100 0111</b>	Colour: black	70	975

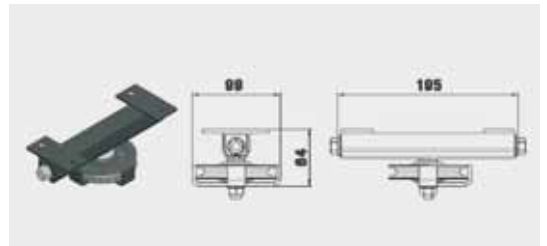

Art.- No.	<b>Cross-Over Pulley</b> <ul style="list-style-type: none"> <li>• Ball bearing.</li> <li>• For rope up to Ø 8 mm.</li> </ul>	Pulley Diameter mm	Weight g
<b>3100 0131</b>	Colour: black	70	935

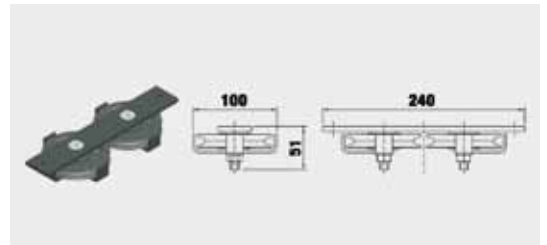

Art.- No.	<b>Ceiling Mounting Plate</b> <ul style="list-style-type: none"> <li>• For direct ceiling/surface mounting.</li> <li>• Adjustment area +/- 4 mm.</li> <li>• With hole to accept M6 screw.</li> </ul>	Pulley Diameter mm	Weight g
<b>3100 8021</b>	Colour: black		185
<b>3100 8022</b>	Colour: silver		185

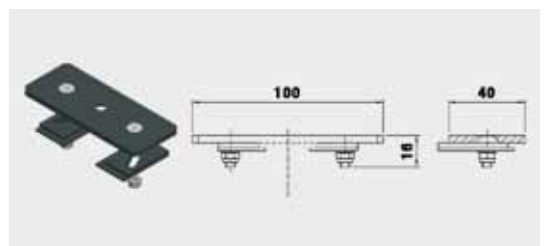


TRUMPF

## 1.10 TRUMPF: Side Cord Operation


Art.- No.	<b>Polyester Rope</b>			Weight g/rm
	<ul style="list-style-type: none"> <li>• Ø 8 mm.</li> <li>• Tensile strength: approx. 1.163 daN.</li> <li>• Max. length: 200 m.</li> <li>• Non-stretch.</li> </ul>			
<b>4104 1182</b>	Colour: black			40



Art.- No.	<b>Stirrup Floor Pulley</b>			Weight g
	<ul style="list-style-type: none"> <li>• With foot stirrup and Ø 10 mm hole for screwing on the floor.</li> <li>• Tensioned by foot pressure.</li> <li>• For use with max. Ø 8 mm rope.</li> </ul>			
<b>3100 7061</b>	Colour: black			1.205

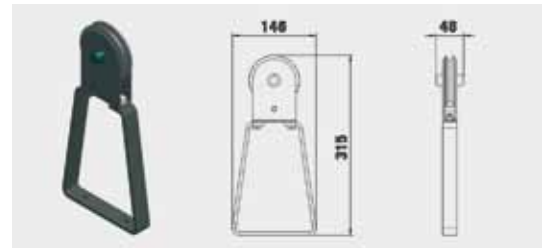


Art.- No.	<b>Adjustable Floor Pulley 180</b>		Tension Distance mm	Weight g
	<ul style="list-style-type: none"> <li>• With Ø 10 mm hole for screwing on the floor.</li> <li>• Tensioning by adjustable pulley.</li> <li>• For use with max. Ø 8 mm rope.</li> </ul>			
<b>3100 7071</b>	Colour: black		180	1.395

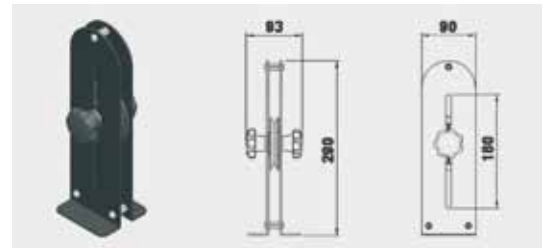

Art.- No.	<b>Adjustable Floor Pulley 350</b>		Tension Distance mm	Weight g
	<ul style="list-style-type: none"> <li>• With Ø 10 mm hole for screwing on the floor.</li> <li>• Tensioning by adjustable pulley.</li> <li>• For use with max. Ø 8 mm rope.</li> </ul>			
<b>3100 7081</b>	Colour: black		350	3.600



Art.- No.	<b>Self Tensioning Floor Pulley</b>			Weight g
	<ul style="list-style-type: none"> <li>• With Ø 10 mm hole for screwing on the floor.</li> <li>• Tensioning via metal block.</li> <li>• For mobile applications.</li> <li>• For use with max. Ø 8 mm rope.</li> </ul>			
<b>3100 7011</b>	Colour: black			12.445

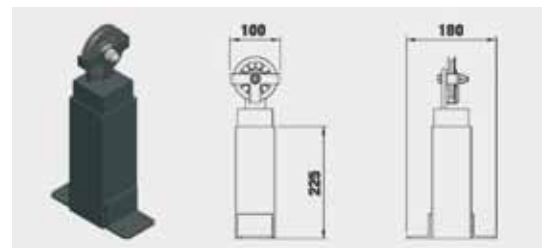

Gerriets GmbH  
 Im Kirchenhürstle 5-7  
 D-79224 Umkirch  
 ☎ +49 7665 960-0  
 ☎ +49 7665 960-125  
 info@gerriets.com

Gerriets S. A. R. L.  
 Rue du Pourquoi Pas  
 F-68600 Volgelsheim  
 ☎ +33 3 89 22 70 22  
 ☎ +33 3 89 22 70 50  
 gerriets@gerriets.com

Gerriets International Inc.  
 130 Winterwood Avenue  
 Ewing NJ 08638, USA  
 ☎ +1 609 758-9121  
 ☎ +1 609 758-9596  
 mail@gi-info.com

Gerriets Great Britain Ltd.  
 18 Verney Road  
 London SE16 3DH, UK  
 ☎ +44 20 7639 7704  
 ☎ +44 20 7732 5760  
 general@gerriets.co.uk

Gerriets Handel GmbH  
 Gorskistraße 8  
 A-1230 Wien  
 ☎ +43 1 6000 600-0  
 ☎ +43 1 6032 585  
 verkauf@gerriets.at

Gerriets España S. L.  
 Pol. Ind. Arroyo Buzanca  
 Avda. de Las Moreras  
 Sector S-19 B, Naves 1-2-3  
 E-28350 Ciempozuelos, Madrid  
 ☎ +34 91 134 5022  
 ☎ +34 91 134 5084  
 gerriets.spain@gmail.com

Gerriets Italia  
 Risam for show  
 Viale Spagna 150 / B  
 I-20093 Cologno Monzese (MI)  
 ☎ +39 02 2532 113  
 ☎ +39 02 2532 130  
 info@risamforshow.com

Gerriets Belgique  
 Distribué par :  
 Gerriets S. A. R. L.  
 Rue du Pourquoi Pas  
 F-68600 Volgelsheim  
 ☎ +33 3 89 22 70 22  
 ☎ +33 3 89 22 70 50  
 gerriets@gerriets.com

Gerriets Nederland  
 Anthony Fokkerweg 3  
 NL-1059 CM Amsterdam  
 ☎ +31 20-40 82 553  
 ☎ +31 20-40 82 662  
 info@gerriets.nl

Gerriets Greece  
 info@gerriets.gr  
 www.gerriets.gr

Gerriets Turkey  
 Benart Ses Isik-ASC Is Merkezi  
 Mahmut Sevket Pasa Mahallesi  
 Piyale Pasa Bulvari  
 Baran Sk No: 4 Kat: 3 Zemin Kat  
 TR-34384 Okmeydani-Sisli-Istanbul  
 ☎ +90 212 254 33 43  
 ☎ +90 212 254 33 53  
 benart@benart.net

Gerriets Korea  
 4F 449-4 Seongnae-dong  
 Gangdong-gu, Seoul  
 Korea 134-030  
 ☎ +82 2 477 7713  
 ☎ +82 2 477 1490  
 info@gerriets.co.kr

www.gerriets.com

